


NOTES:

Electrical properties:


1. 100% open and short test.
2. Pass Quantum data 780E hand hold test instrument for HDMI2.0.
3. Pass 4K*2K/60Hz PC test.
4. Support resolution up to 4K*2K/60Hz 4:4:4 or RGB.
5. Support HDR 4K*2K/60Hz 4:2:2.
6. Support HDCP2.2, HDCP1.4.
7. DP1.2 in, HDMI1.4B (4K*2K/30Hz 4:4:4) out.
DP1.4 in, HDMI2.0 (4K*2K/60Hz 4:4:4) out.
8. IC: SCDH60V1, level-shift.

ROHS 2.0 and REACH compliant.


Cable Flag
Size: 70*15mm

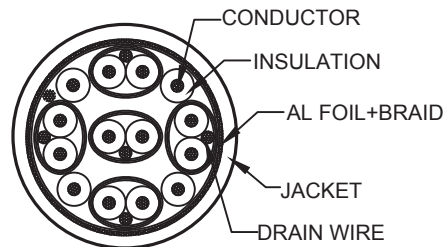

PIN OUT

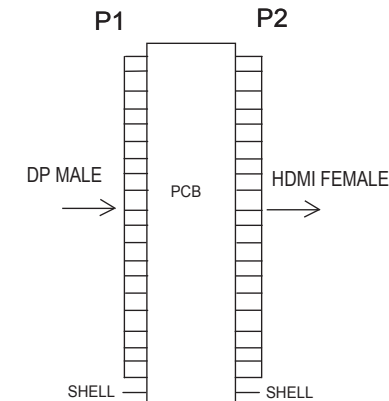

PACKAGE DRAW

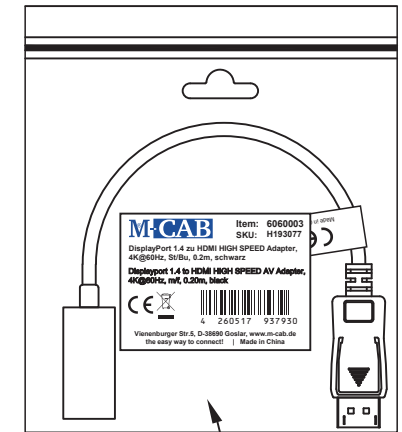

MATERIAL LIST

⑥	PACKAGE	PE ZIP BAG+BARCODE STICKER	1					
⑤	CABLE	(1/0.18BC*1P+1/0.184BC+AM)*5C+1/0.20BC*5C+AM+1/0.18BC+64/0.12ALMG+PVC, OD: 5.0±0.2MM, COLOR: BLACK	0.15M					
④	OUTER MOLD	BLACK ABS	1	DRAW No.		NAME	DP1.4/M to HDMI2.0/F CABLE	
③	OUTER MOLD	BLACK ABS	1	CUSTOMER	M-CAB	MAPE	TOLERANCE	
②	CONNECTOR	HDMI A FEMALE, GOLD PLATED PIN ,GOLD PLATED SHELL	1	MODEL No.	6060003		X. ±1.00 X.X ±0.50	
①	CONNECTOR	DP1.4 MALE, GOLD PLATED PIN,GOLD PLATED SHELL, RED INSERTER	1	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM
No.	PART NAME	DESCRIPTION	QTY					
							PAGE	1/1